



UL 4476

Product Description



Rated voltage

150V/300V/600V/1000V



Rated temperature

150°C / 200°C



Fire Performances

Horizontal flame / Cable flame



AWG

50AWG-2000kcmil



Conductor

Solid / Stranded(Silver plated)



Insulation

UL Labeled



Assembly

2 or more conductor twisted together



Shield

Optional



Jacket

Silicone




Bend Radius

10X

Marking Example:

E209277 cUL AWM STYLE 4476 200°C 600V FT2 □□AWG
3A AWM IA 200°C 600V □□AWG FT2 3A LF

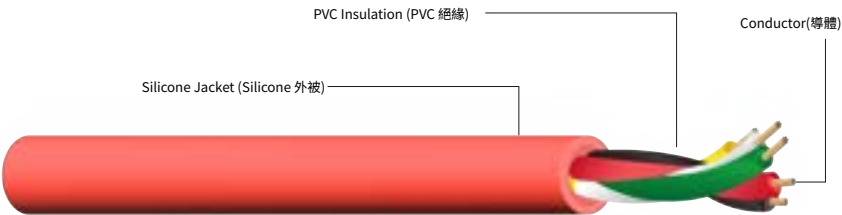

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
14	37/0.254	2	2.42	1.14	7.12±0.10
16	26/0.254	2	2.13	1.14	6.49±0.10
18	34/0.18	2	1.85	1.14	5.83±0.10
20	21/0.18	2	1.59	1.14	5.41±0.10
22	17/0.16	2	1.40	1.14	4.83±0.10
24	11/0.16	2	1.25	1.14	4.78±0.10
26	7/0.16	2	1.13	1.14	4.53±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

