



## 600V SR Wire

## UL 3123

## Product Description

 Rated voltage  
**600V**

 Rated temperature  
**150°C**

 Fire Performances  
**Horizontal flame**


 AWG  
**30AWG-16AWG**

 Conductor  
**Solid / Stranded**

 Insulation  
**SR**

 Bend Radius  
**10X**

**Marking Example:**  
E209277 cUL AWM STYLE 3123 150°C 600V FT2 □□AWG  
3A AWM IA 150°C 600V □□AWG FT2 3A LF

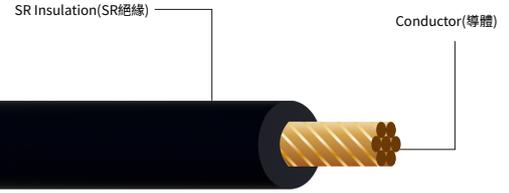

Conductor			Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Insulation Thickness (mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
<b>16</b>	26/0.254	1.50	0.82	3.14±0.1
<b>18</b>	34/0.18	1.21	0.82	2.86±0.1
<b>20</b>	21/0.18	0.95	0.82	2.60±0.1
<b>22</b>	17/0.16	0.76	0.82	2.41±0.1
<b>24</b>	11/0.16	0.62	0.82	2.26±0.1
<b>26</b>	7/0.16	0.49	0.82	2.13±0.1
<b>28</b>	7/0.127	0.39	0.82	2.03±0.1
<b>30</b>	7/0.10	0.31	0.82	1.95±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners