



UL 2586

Product Description



Rated voltage

600V / 1000V



Rated temperature

105°C



Fire Performances

Cable flame



AWG

40AWG min



Conductor

Solid/ Stranded



Insulation

UL Labeled



Assembly

2- more



Shield / Covering

Optional / PVC



Jacket

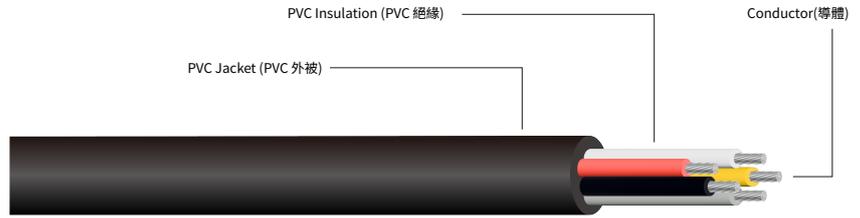
PVC



Bend Radius

10X

Marking Example:

E209277 cUL AWM STYLE 2586 105°C 600 V VW-1 □□AWG
3A AWM IA 105°C 600 V □□AWG VW-1 3A LF

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	芯線(C) 芯線直徑(mm)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
10	105/0.254	2	3.64	0.76	8.81±0.20
12	65/0.254	2	3.00	0.76	7.53±0.20
14	41/0.254	2	2.52	0.76	6.56±0.20
16	50/0.18	4	2.11	0.76	5.57±0.20
	26/0.254	1P	2.13	0.76	10.60±0.20
18	34/0.18	2	1.85	0.76	5.22±0.20
20	21/0.18	2	1.59	0.76	4.70±0.20
26	7/0.16	1P	1.13	0.76	10.60±0.20

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

