



# UL 20744

## Product Description

 Rated voltage  
**30V/150V**

 Rated temperature  
**60°C / 80°C**

 Fire Performances  
**Horizontal flame**

 AWG  
**36AWG-10AWG**

 Conductor  
**Solid / Stranded**


 Insulation  
**UL Labeled**

 Assembly  
**2-200 insulated singles twisted pair  
triads or quads laid parallel in one plane**

 Shield  
**Optional**

 Outer Covering  
**PVC(Optional)/  
PTFE/Polyester film**

 Bend Radius  
**10X**

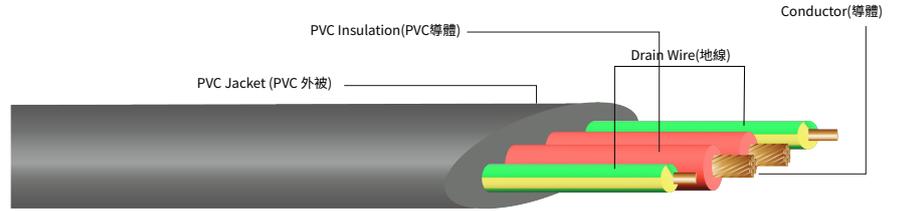

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
<b>30</b>	1/0.254	1.08	2F	0.50	0.9x2.2±0.05

### AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:  
E209277 cUL AWM STYLE 20744 80°C 30V FT2 □□AWG  
3A AWM IA 80°C 30V □□AWG FT2 3A LF

