



UL 20904

Product Description

 **Rated voltage**
600V

 **Rated temperature**
105°C

 **Fire Performances**
Cable flame

 **AWG**
20AWG-2AWG

 **Conductor**
Stranded


 **Insulation**
UL Labeled

 **Assembly**
**2-60 individually insulated
conductors / groups of insulated
conductors to form a round cable.**

 **Jacket**
TPE

 **Bend Radius**
5X

Marking Example:
E209277 cUL AWM STYLE 20904 105°C 600V VW-1 □□AWG
3A AWM IA 105°C 600V □□AWG VW-1 3A LF

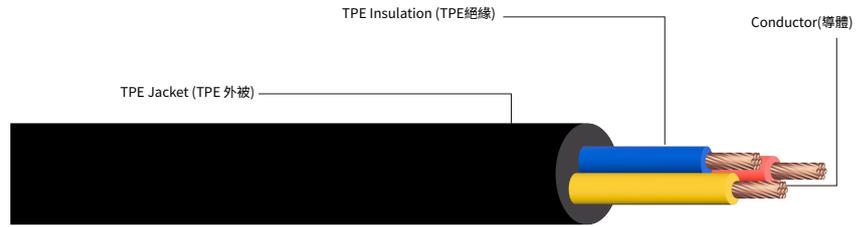

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
2	665/0.254	2	10.61	2.03	21.00±0.1
4	420/0.254	2	9.06	2.03	18.90±0.1
6	259/0.254	2	7.77	2.03	16.80±0.1
8	161/0.254	2	6.76	2.03	15.10±0.1
10	105/0.254	2	5.29	2.03	12.80±0.1
12	65/0.254	2	4.65	2.03	11.70±0.1
14	41/0.254	2	4.16	2.03	10.90±0.1
16	26/0.254	3	6.40	2.03	10.50±0.1
18	34/0.18	2	2.74	2.03	9.00±0.1
20	21/0.18	2	2.48	2.03	8.50±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners