



## UL 2468

## Product Description

Rated voltage

**300V**

Rated temperature

**80°C**

Fire Performances

**Horizontal flame**

AWG

**32AWG-16AWG**

Conductor

**Solid / Stranded**

Insulation

**PVC**

Assembly

**2-150 conductors laid  
parallel and in one plane.**


Shield / Covering

**Optional**

Bend Radius

**10X**

Marking Example:  
E209277 cUL AWM STYLE 2468 80°C 300V FT2 □□AWG  
3A AWM IA 80°C 300V □□AWG FT2 3A LF

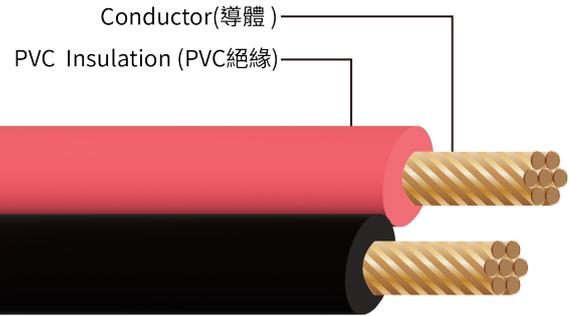

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
<b>16</b>	26/0.254	1.50	2F	0.40	2.8x5.6±0.1
<b>18</b>	34/0.18	1.21	2F	0.40	2.3x4.6±0.1
<b>20</b>	21/0.18	0.95	2F	0.40	1.8x3.6±0.1
<b>22</b>	17/0.16	0.76	2F	0.40	1.65x3.3±0.1
<b>24</b>	11/0.16	0.62	2F	0.40	1.7x3.4±0.1
<b>26</b>	7/0.16	0.49	2F	0.40	1.6x2.6±0.1
<b>28</b>	7/0.127	0.39	2F	0.40	1.17±2.340.1
<b>30</b>	7/0.10	0.31	2F	0.40	1.19x2.38±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners